


HIGH FLOW RATE

Fittings demonstrate excellent hydraulic flow characteristics

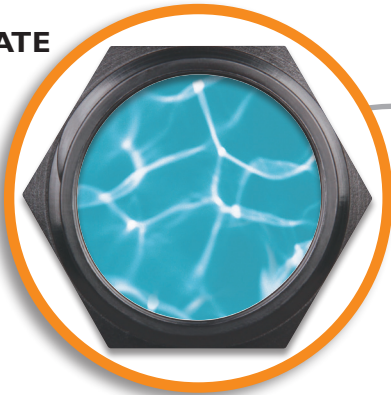

PRECISION HEAVY DUTY TAPERED THREADS

Gives a Strong Reliable Seal. Material is strong enough to minimise potential cross threading.

MADE FROM HIGH QUALITY DURABLE MATERIALS

Manufactured from UV Stabilised High Quality Glass Fibre Reinforced Nylon giving a weather, termite, fungi and bacterial resistance



AS/NZS 4020

WRAS
APPROVED
PRODUCT

POTABLE WATER APPROVED

Material Approved for use with Potable (drinkable) Water



FAST AND EASY TO INSTALL

No specialist skill required. Apply threaded sealant or tape, screw on pipe, tighten.*



1. Apply Thread Sealant or Thread Tape

2. Screw on pipe

3. Tighten

LARGE RANGE

of over 180 Durable, High Strength, Commercial Quality True Fit Pipe Fittings available in sizes 6mm to 100mm (1/8" to 4")



*We recommend Loctite 5331 thread sealant. All pipe work must be adequately supported.

HANSEN
True Fit Threaded Fittings

Reliable Commercial Quality Threaded Fittings

www.hansenproducts.com